




4 Devon Rd, Pinetown, 3610. P.O. Box 155, New Germany, 3620
E-Mail: info@auto-gate.co.za Web site: www.auto-gate.co.za

Industrial Gate Automation


Sliding Gate Operators

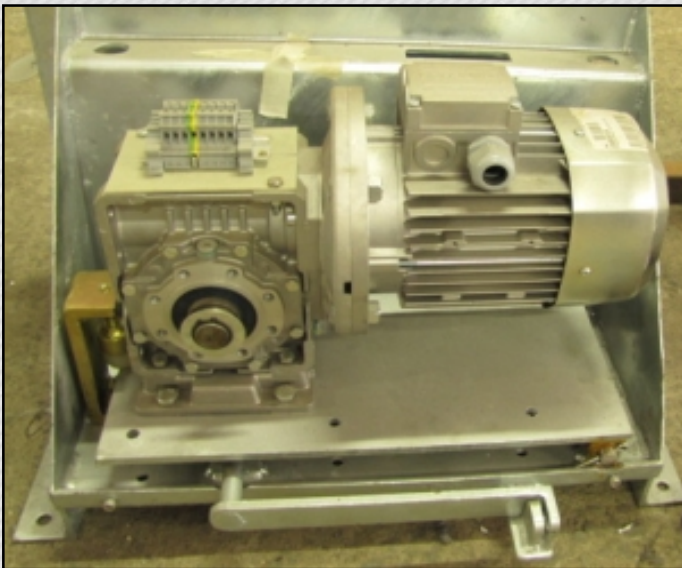

Autogate Heavy Duty Gate Operator

Specifications

Gearbox : Industrial worm drive, oil filled, direct coupled
Motor : 0.75 – 2.2kW TEFC 3 phase motors available
Speed : Selectable with frequency adjustment
180 – 450mm/sec (240mm @ 50Hz)
Controls : Inputs for all ancillaries, beams, loops,
access control, transponders, remotes
Softstart : Allows smooth acceleration, DC braking
to slow gate down.
Protection : Full motor overload protection in softstart
Safety : Proactive – Beams and loops (optional)
Reactive – Anti crush safety edge on gate (opt.)
Gate Size : Up to 18m wide x 3m high on 0.75kW motor
1.1 – 2.2kW motors for larger heavier gates
Gate Weight : Maximum 2500kg
Motor Weight : 45kg

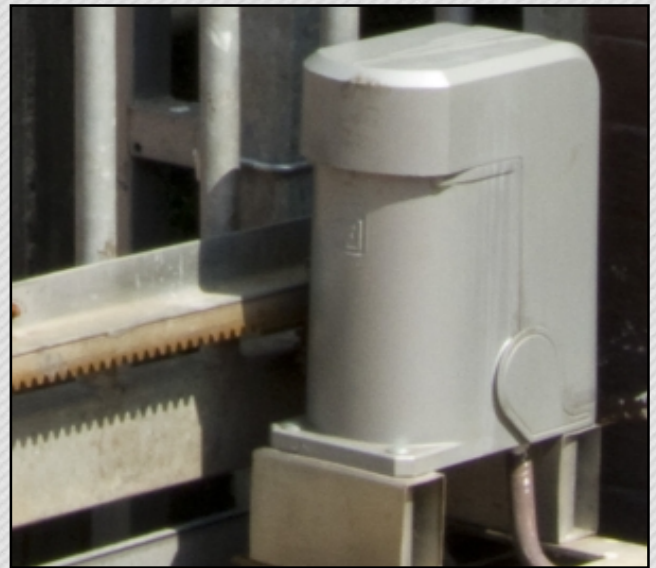

Fadini 0.75 Gate Operator

Industrial worm drive, direct coupled
0.75kW 3 phase motor
Selectable with frequency adjustment
180 – 360mm/sec (180mm @ 50Hz)
Input for all ancillaries, beams, loops,
access control, transponders, remotes
Allows smooth acceleration, DC braking
to slow gate down.
Full motor overload protection in softstart
Proactive – Beams and loops (optional)
Reactive – Anti crush safety edge on gate (opt.)
Up to 8m wide x 3m high
Maximum 600kg
20kg

FULL HEIGHT TURNSTILES | WAIST HEIGHT TURNSTILES | HALF HEIGHT TURNSTILES | GLASS TURNSTILES | VEHICLE BARRIERS | SPECIAL NEEDS GATES | BOOTHS | INDUSTRIAL GATES | ROTADOORS | AUTOMATION | PEDESTRIAN BARRIERS
© COPYRIGHT 2010 AUTOGATE


For further information : Tel: +27 31 701 0113 Fax: +27 31 702 6280



4 Devon Rd, Pinetown, 3610. P.O. Box 155, New Germany, 3620
E-Mail: info@auto-gate.co.za Web site: www.auto-gate.co.za

Industrial Gate Automation

Swing Gate Operators

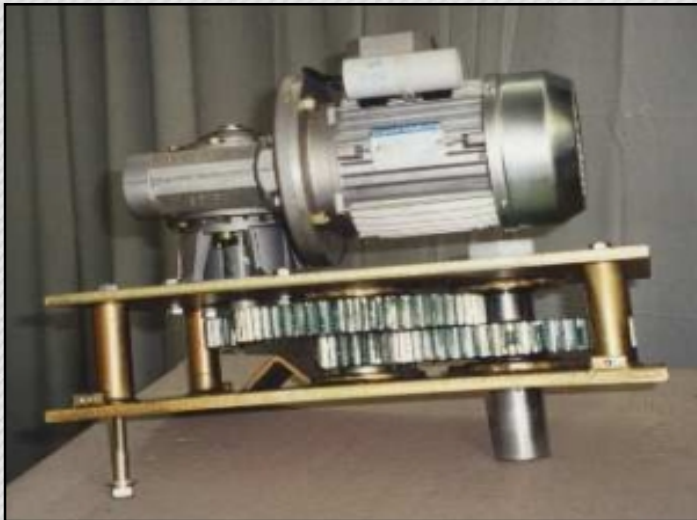


Autogate Heavy Duty Gate Operator

Specifications

- Gearbox :** Industrial worm drive, oil filled, direct coupled
- Motor :** 0.75 – 2.2kW TEFC 3 phase motors available
- Controls :** Inputs for all ancillaries, beams, loops, access control, transponders, remotes
- Softstart :** Allows smooth acceleration, DC braking to slow gate down.
- Protection :** Full motor overload protection in softstart
- Safety :** Proactive – Beams and loops
Reactive – Anti crush safety edge on gate
- Gate Size :** Up to 7.5m wide x 3m high on 0.75kW motor
1.1 – 2.2kW motors for larger heavier gates
- Motor Weight :** 100kg



Other Light Duty Industrial Options

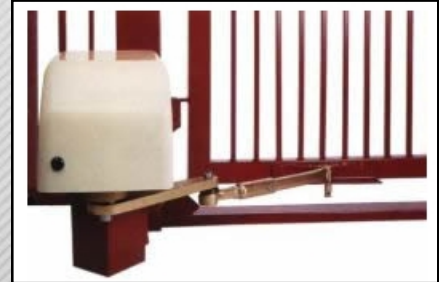

Centurion Maxi-Mate



Centurion A10/D10



Centurion D5

FULL HEIGHT TURNSTILES | WAIST HEIGHT TURNSTILES | HALF HEIGHT TURNSTILES | GLASS TURNSTILES | VEHICLE BARRIERS | SPECIAL NEEDS GATES | BOOTHS | INDUSTRIAL GATES | ROTADOORS | AUTOMATION | PEDESTRIAN BARRIERS
© COPYRIGHT 2010 AUTOGATE

For further information : Tel: +27 31 701 0113 Fax: +27 31 702 6280